

**DESA Heating LLC<sup>tm</sup>**

***PFA Filter Replacement***

# Filter Kit




- Designed to fit a range of kerosene heaters. Check the package for your specific model number.

# Tools Needed




- 5/16" Nutdriver

# Getting Started

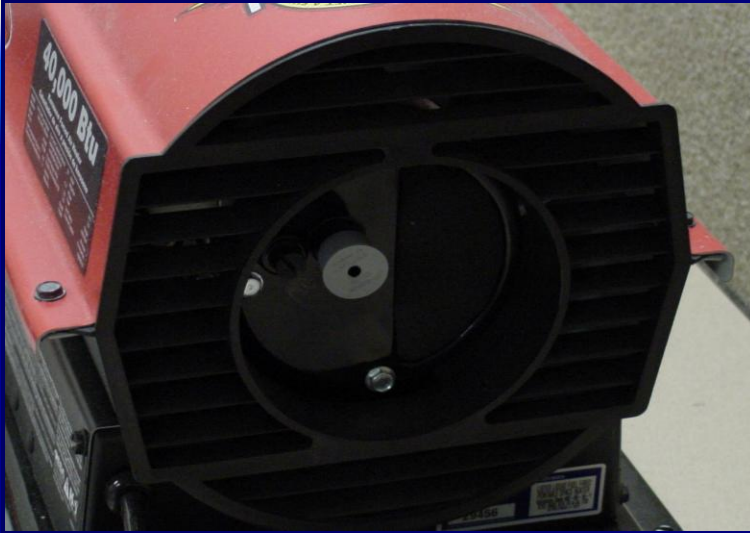


- Remove the upper shell and end-cover guard

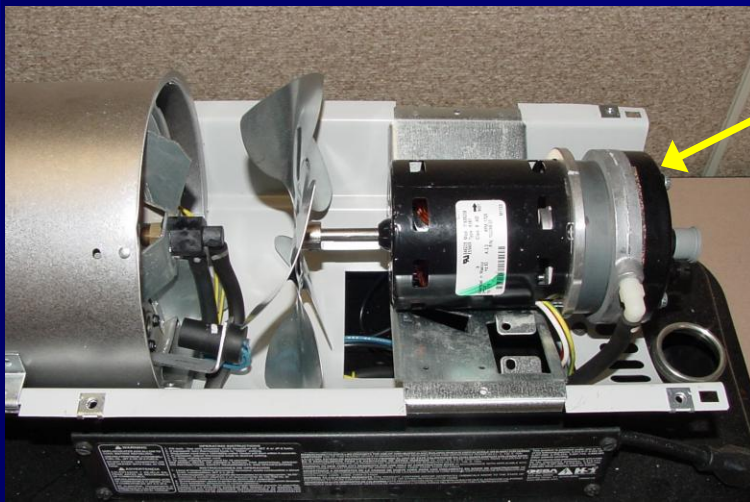


- You can now see the pump assembly attached to the back of the fan motor.

# Disassembly

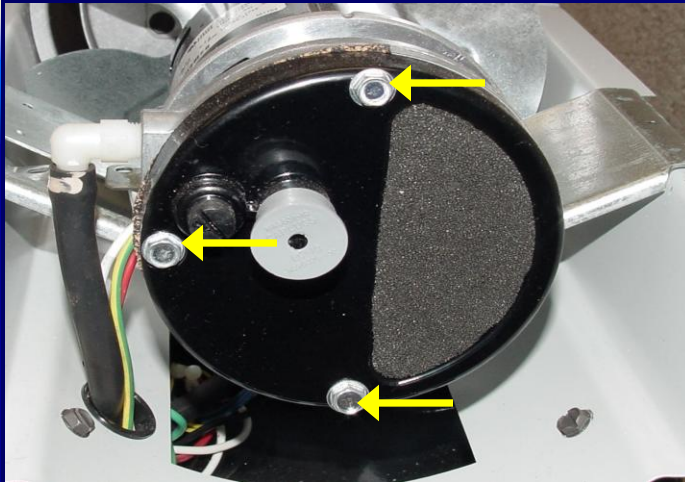


- Remove the three screws holding the end-cover in place and set the end cover aside.

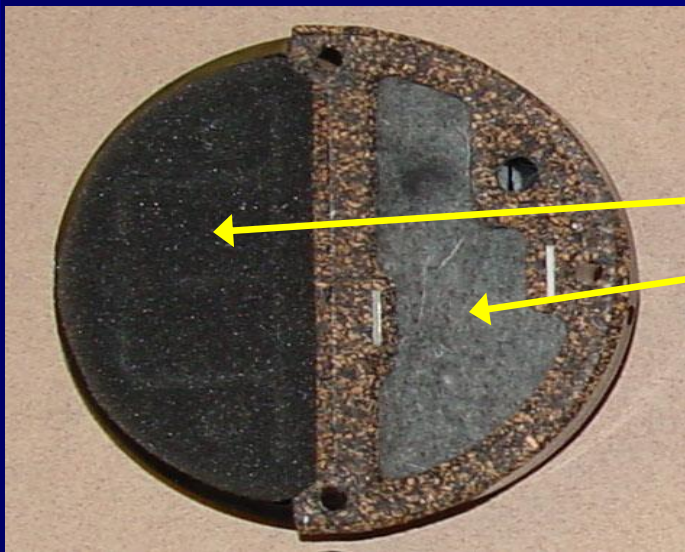


- The Intake and Output filters are located in the end-cover.

# Replace the Filters

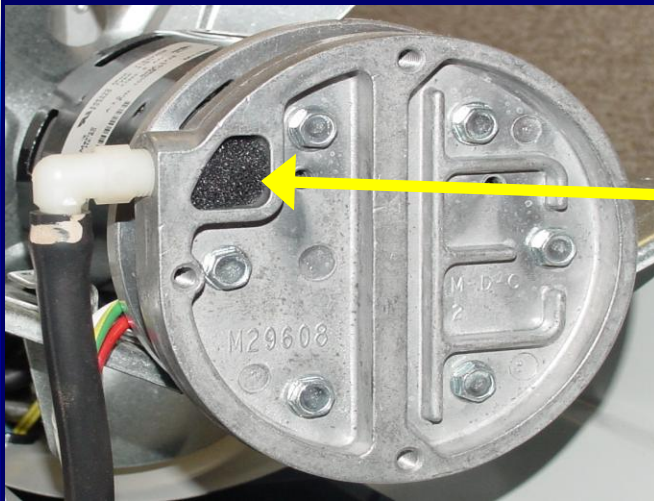


- Pull out the lint filter and discard. Put the new filter carefully into place.

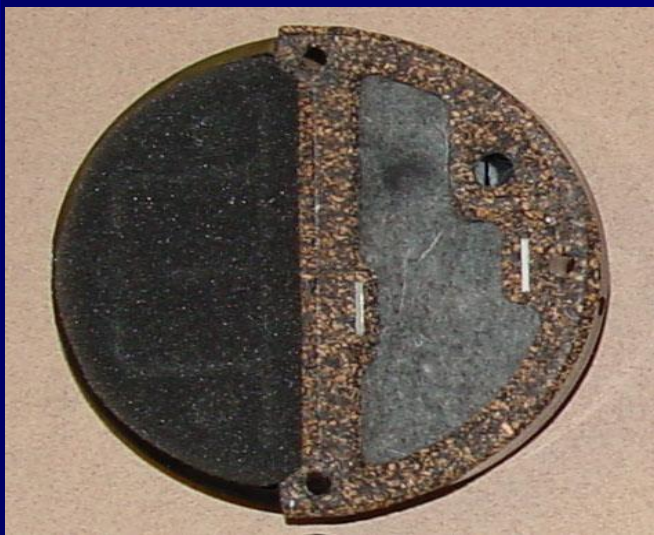

- Replace the input and output filters, being careful to place them in the correct position.

# Reassembly

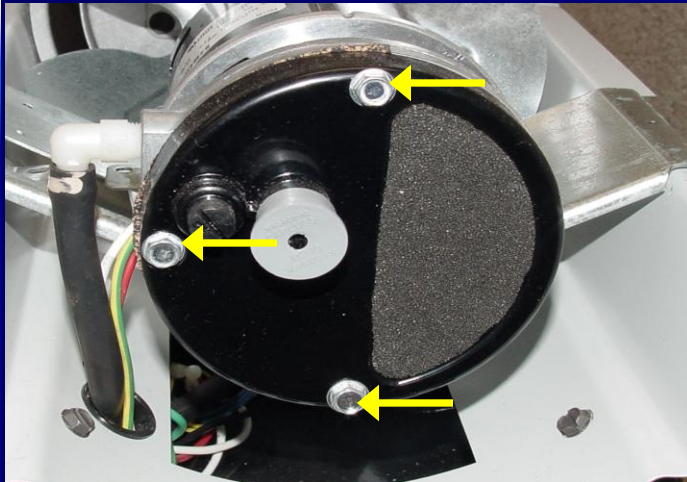

- Reattach the end-cover being careful to not over-tighten the screws. Over-tightening will crack the end cover causing an air pressure leak.
- Replace the end-cover guard, slide the upper-shell back on, and fasten in place.

**Desa Heating LLC**

**Thank you!**